


ZIRKOL – L 80

ZIRKOL – L is a family of linear suspension lamps suitable for general and decorative lighting.

Anodized aluminium body and opal screen to a homogeneous lighting. CRI > 80

Light emission can be direct light and double light emission with high flux and different colour temperatures.

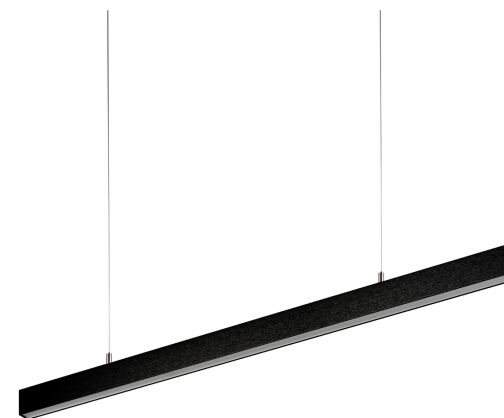

1M | DOWNLIGHT - 3000K - HIGH FLUX

LAMPING

Source	Linear LED
Total power	19W
Emission	Diffused
Tension	24VDC
Color temperature	3000K
Luminous flux	1900lm/m
Initial luminaire efficacy	82lm/W
Initial chromaticity	SDCM < 3
Typ CRI	> 80
Energy class	A+
IP class	40
Dimensions	100x2,6x5cm
Materials	Aluminium
Ambient temperature range	20°C / 35°
Performance ambient temperature	25°
Notes	compatible controls: 1-10V, DALI, DMX, Casambi; cable 2m; suspension kit included; driver not included
Customization options	Shapes, sizes, colour temperatures, RGB, RGBW
Net lamp weight	1,2 kg

Codes

BZRL0310G15WNE

Structure


black

PACKAGE

Package 01

Dimension: 100x2,6x5 cm / Gross weight: 1,25 kg

Certificazioni

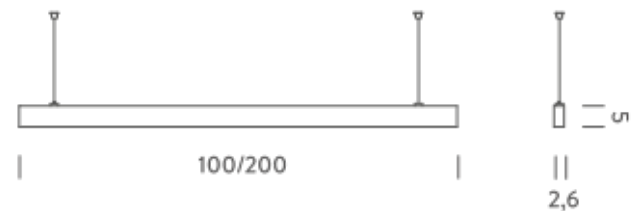

1M | UP - DOWNLIGHT - 3000K - HIGH FLUX

LAMPING

Source	Linear LED
Total power	38W
Emission	Diffused
Tension	24VDC
Color temperature	4000K
Luminous flux	1200lm/m + 1900lm/m
Initial luminaire efficacy	100lm/W
Initial chromaticity	SDCM < 3
Typ CRI	> 80
Energy class	A+
IP class	40
Dimensions	100x2,6x5cm
Materials	Aluminium
Ambient temperature range	20°C / 35°
Performance ambient temperature	25°
Notes	compatible controls: 1-10V, DALI, DMX, Casambi; cable 2m; suspension kit included; driver not included
Customization options	Shapes, sizes, colour temperatures, RGB, RGBW
Net lamp weight	1,2 kg

Codes

BZRL1410G15WNE

Structure


black

PACKAGE

Package 01

Dimension: 100x2,6x5 cm / Gross weight: 1,25 kg

Certificazioni

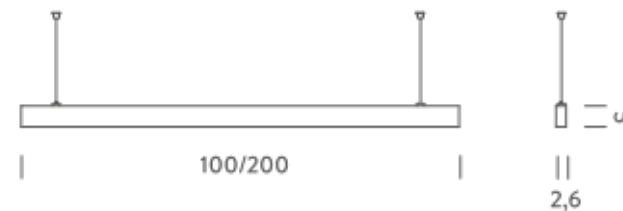

1M | DOWNLIGHT - 4000K - HIGH FLUX

LAMPING

Source	Linear LED
Total power	19W
Emission	Diffused
Tension	24VDC
Color temperature	3000K
Luminous flux	1900lm/m
Initial luminaire efficacy	82lm/W
Initial chromaticity	SDCM < 3
Typ CRI	> 80
Energy class	A+
IP class	40
Dimensions	100x2,6x5cm
Materials	Aluminium
Ambient temperature range	20°C / 35°
Performance ambient temperature	25°
Notes	compatible controls: 1-10V, DALI, DMX, Casambi; cable 2m; suspension kit included; driver not included
Customization options	Shapes, sizes, colour temperatures, RGB, RGBW
Net lamp weight	1,2 kg

Codes

BZRL0310G15NNE

Structure


black

PACKAGE

Package 01

Dimension: 100x2,6x5 cm / Gross weight: 1,25 kg

Certificazioni

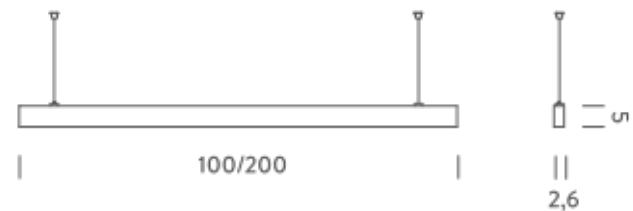

1M | UP - DOWNLIGHT - 4000K - HIGH FLUX

LAMPING

Source	Linear LED
Total power	38W
Emission	Diffused
Tension	24VDC
Color temperature	4000K
Luminous flux	1200lm/m + 1900lm/m
Initial luminaire efficacy	100lm/W
Initial chromaticity	SDCM < 3
Typ CRI	> 80
Energy class	A+
IP class	40
Dimensions	100x2,6x5cm
Materials	Aluminium
Ambient temperature range	20°C / 35°
Performance ambient temperature	25°
Notes	compatible controls: 1-10V, DALI, DMX, Casambi; cable 2m; suspension kit included; driver not included
Customization options	Shapes, sizes, colour temperatures, RGB, RGBW
Net lamp weight	1,2 kg

Codes

BZRL1410G15NNE

Structure


black

PACKAGE

Package 01

Dimension: 200x2,6x5 cm / Gross weight: 2,55 kg

Certificazioni

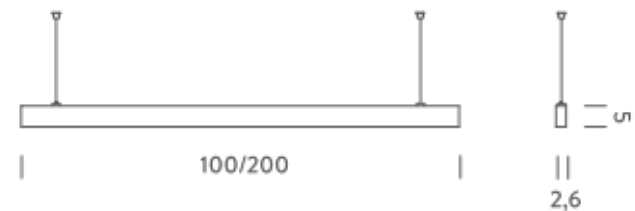

2M | DOWNLIGHT - 3000K - HIGH FLUX

LAMPING

Source	Linear LED
Total power	38W
Emission	Diffused
Tension	24VDC
Color temperature	3000K
Luminous flux	1900lm/m
Initial luminaire efficacy	82lm/W
Initial chromaticity	SDCM < 3
Typ CRI	> 80
Energy class	A+
IP class	40
Dimensions	200x2,6x5cm
Materials	Aluminium
Ambient temperature range	20°C / 35°
Performance ambient temperature	25°
Notes	compatible controls: 1-10V, DALI, DMX, Casambi; cable 2m; suspension kit included; driver not included
Customization options	Shapes, sizes, colour temperatures, RGB, RGBW
Net lamp weight	2,4 kg

Codes

BZRL0320G15WNE

Structure


black

PACKAGE

Package 01

Dimension: 200x2,6x5 cm / Gross weight: 2,55 kg

Certificazioni

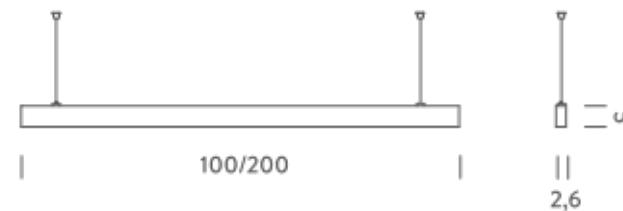

2M | UP - DOWNLIGHT - 3000K - HIGH FLUX

LAMPING

Source	Linear LED
Total power	76W
Emission	Diffused
Tension	24VDC
Color temperature	4000K
Luminous flux	1200lm/m + 1900lm/m
Initial luminaire efficacy	100lm/W
Initial chromaticity	SDCM < 3
Typ CRI	> 80
Energy class	A+
IP class	40
Dimensions	200x2,6x5cm
Materials	Aluminium
Ambient temperature range	20°C / 35°
Performance ambient temperature	25°
Notes	compatible controls: 1-10V, DALI, DMX, Casambi; cable 2m; suspension kit included; driver not included
Customization options	Shapes, sizes, colour temperatures, RGB, RGBW
Net lamp weight	2,4 kg

Codes

BZRL1420G15WNE

Structure


black

PACKAGE

Package 01

Dimension: 200x2,6x5 cm / Gross weight: 2,55 kg

Certificazioni

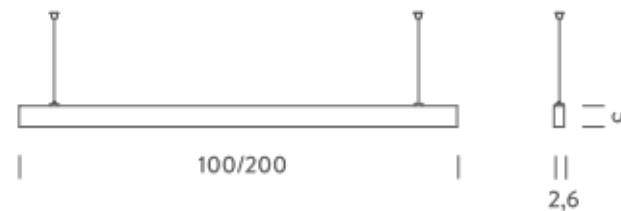

2M | DOWNLIGHT - 4000K - HIGH FLUX

LAMPING

Source	Linear LED
Total power	38W
Emission	Diffused
Tension	24VDC
Color temperature	3000K
Luminous flux	1900lm/m
Initial luminaire efficacy	82lm/W
Initial chromaticity	SDCM < 3
Typ CRI	> 80
Energy class	A+
IP class	40
Dimensions	200x2,6x5cm
Materials	Aluminium
Ambient temperature range	20°C / 50°
Performance ambient temperature	25°
Notes	compatible controls: 1-10V, DALI, DMX, Casambi; cable 2m; suspension kit included; driver not included
Customization options	Colour temperatures, coloured LED
Net lamp weight	2,4 kg

Codes

BZRL0320G15NNE

Structure


black

PACKAGE

Package 01

Dimension: 200x2,6x5 cm / Gross weight: 2,55 kg

Certificazioni

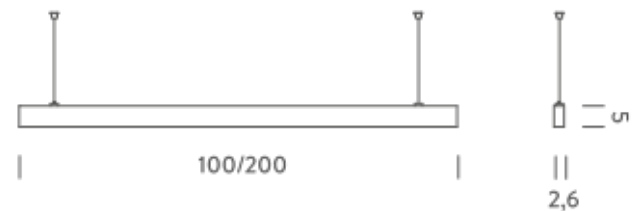

2M | UP - DOWNLIGHT - 4000K - HIGH FLUX

LAMPING

Source	Linear LED
Total power	76W
Emission	Diffused
Tension	24VDC
Color temperature	4000K
Luminous flux	1200lm/m + 1900lm/m
Initial chromaticity	SDCM < 5
Typ CRI	> 80
Energy class	A+
IP class	40
Dimensions	200x2,6x5cm
Materials	Aluminium
Ambient temperature range	20°C / 50°
Performance ambient temperature	25°
Mechanical impact protection code	IK10
Notes	compatible controls: 1-10V, DALI, DMX, Casambi; cable 2m; suspension kit included; driver not included
Net lamp weight	2,4 kg

Codes

BZRL1420G15NNE

Structure

black

PACKAGE

Package 01	Dimension: 14,2x14,2x9,3 cm / Gross weight: 1,1 kg
------------	--

Certificazioni

