

LUX 20

Lux 20 è una famiglia di faretti LED da incasso stagno per esterni. Disponibile con corpo in ottone cromato satinato o tecnopolimero. E' proposto con differenti fasci ottici e temperature colore o RGB. Lux 20 è disponibile anche con schermo di protezione opale per un'emissione omogenea di luce. Fissaggio tramite cassaforma in plastica non inclusa o tramite molle sagomate in acciaio incluse, nel caso di montaggio ad esempio su controsoffitti. Lux 20 è pedonabile.



BRASS | 3000K - 10°

LAMPING

Source	LED spot
Total power	3,6W
Emission	Direct adjustable
Tension	350mA
Color temperature	3000K
Initial luminaire efficacy	55lm/W
Initial chromaticity	SDCM < 3
Typ CRI	> 90
Energy class	A+
IP class	68
Dimensions	ø5,7x5,4cm
Materials	Sanded chromed brass
Ambient temperature range	-20°C / 35°C
Performance ambient temperature	25°C
Mechanical impact protection code	IK10
Notes	compatible controls: 1-10V, DALI, DMX, Casambi; cable 1m; driver not included, recessed box LUXCASSA3
Accessories	Drivers 350mA, Recessed box, Recessed box cassa 3
Net lamp weight	0,37 kg

Codes

BLUX0103F30WCS

Structure


grey

PACKAGE

Package 01

Dimension: 15x6,5x11 cm / Gross weight: 0,38 kg

Certificazioni

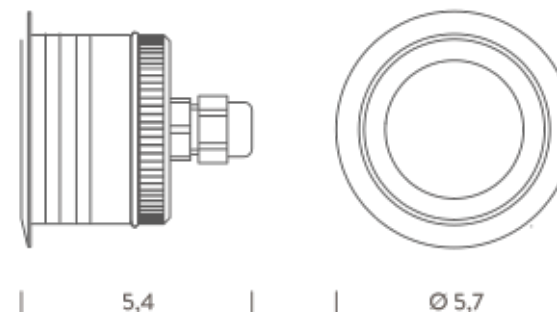

BRASS | 3000K - 25°

LAMPING

Source	LED spot
Total power	3,6W
Emission	Direct adjustable
Tension	350mA
Color temperature	3000K
Luminous flux	200lm
Initial luminaire efficacy	55lm/W
Initial chromaticity	SDCM < 3
Typ CRI	> 90
Energy class	A+
IP class	68
Dimensions	ø5,7x5,4cm
Materials	Sanded chromed brass
Ambient temperature range	-20°C / 35°C
Performance ambient temperature	25°C
Mechanical impact protection code	IK10
Notes	compatible controls: 1-10V, DALI, DMX, Casambi; cable 1m; driver not included, recessed box LUXCASSA3
Accessories	Drivers 350mA, Recessed box, Recessed box cassa 3
Net lamp weight	0,37 kg

Codes

BLUX0103430WCS

Structure


grey

PACKAGE

Package 01

Dimension: 15x6,5x11 cm / Gross weight: 0,38 kg

Certificazioni

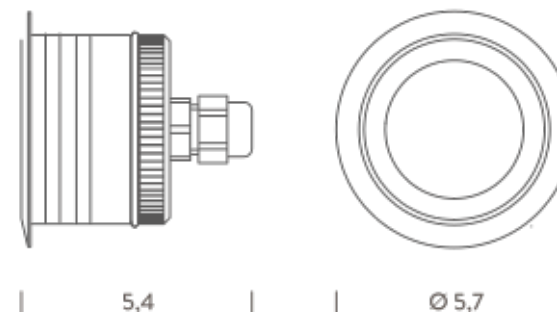

BRASS | 6000K - 10°

LAMPING

Source	LED spot
Total power	3,6W
Emission	Direct adjustable
Tension	350mA
Color temperature	6000K
Initial luminaire efficacy	55lm/W
Initial chromaticity	SDCM < 3
Typ CRI	80
Energy class	A+
IP class	68
Dimensions	ø5,7x5,4cm
Materials	Sanded chromed brass
Ambient temperature range	-20°C / 35°C
Performance ambient temperature	25°C
Mechanical impact protection code	IK10
Notes	compatible controls: 1-10V, DALI, DMX, Casambi; cable 1m; driver not included, recessed box LUXCASSA3
Accessories	Drivers 350mA, Recessed box, Recessed box cassa 3
Net lamp weight	0,37 kg

Codes

BLUX0103F300CS

Structure


grey

PACKAGE

Package 01

Dimension: 15x6,5x11 cm / Gross weight: 0,38 kg

Certificazioni

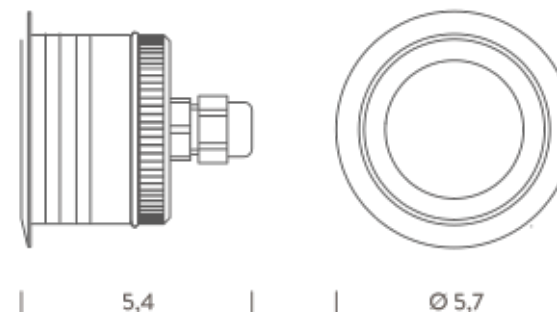

BRASS | 6000K - 25°

LAMPING

Source	LED spot
Total power	3,6W
Emission	Direct adjustable
Tension	350mA
Color temperature	6000K
Initial luminaire efficacy	48lm/W
Initial chromaticity	SDCM < 3
Typ CRI	80
Energy class	A+
IP class	68
Dimensions	ø5,7x5,4cm
Materials	Sanded chromed brass
Ambient temperature range	-20°C / 35°C
Performance ambient temperature	25°C
Mechanical impact protection code	IK10
Notes	compatible controls: 1-10V, DALI, DMX, Casambi; cable 1m; driver not included, recessed box LUXCASSA3
Accessories	Drivers 350mA, Recessed box, Recessed box cassa 3
Net lamp weight	0,37 kg

Codes

BLUX01034300CS

Structure


grey

PACKAGE

Package 01

Dimension: 15x6,5x11 cm / Gross weight: 0,38 kg

Certificazioni

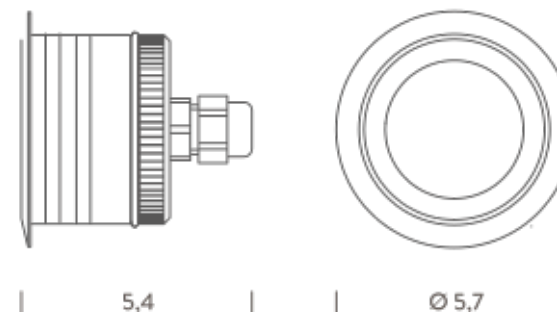

BRASS | 3000K - OPAL

LAMPING

Source	LED spot
Total power	3,6W
Emission	Direct adjustable
Tension	350mA
Color temperature	3000K
Initial luminaire efficacy	48lm/W
Initial chromaticity	SDCM < 3
Energy class	A+
IP class	68
Dimensions	ø5,7x5,4cm
Materials	Sanded chromed brass
Ambient temperature range	-20°C / 35°C
Performance ambient temperature	25°C
Mechanical impact protection code	IK10
Notes	compatible controls: 1-10V, DALI, DMX, Casambi; cable 1m; driver not included, recessed box LUXCASSA3
Accessories	Drivers 700mA, Recessed box, Recessed box cassa 3
Net lamp weight	0,37 kg

Codes

BLUX0101G17WCS


Structure

grey

PACKAGE

Package 01	Dimension: 15x6,5x11 cm / Gross weight: 0,38 kg
------------	---

Certificazioni

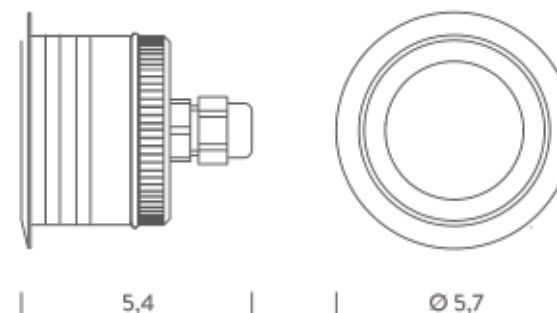

BRASS | 4000K - OPAL

LAMPING

Source	LED spot
Total power	3,6W
Emission	Direct adjustable
Tension	350mA
Color temperature	4000K
Initial luminaire efficacy	55lm/W
Initial chromaticity	SDCM < 3
Energy class	A+
IP class	68
Dimensions	ø5,7x5,4cm
Materials	Sanded chromed brass
Ambient temperature range	-20°C / 35°C
Performance ambient temperature	25°C
Mechanical impact protection code	IK10
Notes	compatible controls: 1-10V, DALI, DMX, Casambi; cable 1m; driver not included, recessed box LUXCASSA3
Accessories	Drivers 700mA, Recessed box, Recessed box cassa 3
Net lamp weight	0,37 kg

Codes

BLUX0101G17NCS


Structure

grey

PACKAGE

Package 01 Dimension: 15x6,5x11 cm / Gross weight: 0,18 kg

Certificazioni

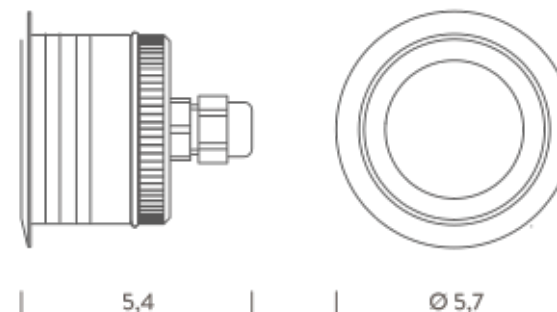

TECHNO-POLYMER | 3000K - 10°

LAMPING

Source	LED spot
Total power	3,6W
Emission	Direct adjustable
Tension	350mA
Color temperature	3000K
Luminous flux	200lm
Initial luminaire efficacy	55lm/W
Initial chromaticity	SDCM < 3
Typ CRI	> 90
Energy class	A+
IP class	68
Dimensions	ø5,7x5,4cm
Materials	Techno-polymer
Ambient temperature range	-20°C / 35°C
Performance ambient temperature	25°C
Mechanical impact protection code	IK10
Notes	

Accessories	compatible controls: 1-10V, DALI, DMX, Casambi; cable 1m; driver not included, recessed box LUXCASSA3
Net lamp weight	0,17 kg

Codes

BLUX0103F30WTF


Structure

opal white

PACKAGE

Package 01	Dimension: 15x6,5x11 cm / Gross weight: 0,18 kg
------------	---

Certificazioni

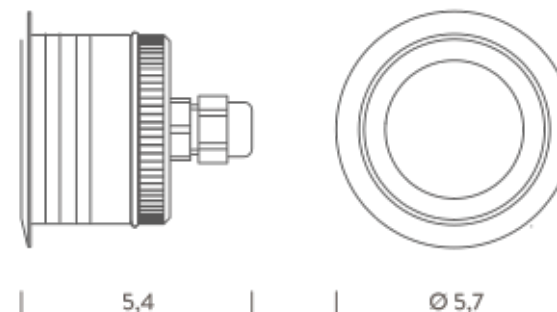

TECHNO-POLYMER | 3000K - 25°

LAMPING

Source	LED spot
Total power	3,6W
Emission	Direct adjustable
Tension	350mA
Color temperature	3000K
Initial luminaire efficacy	55lm/W
Initial chromaticity	SDCM < 3
Typ CRI	> 90
Energy class	A+
IP class	68
Dimensions	ø5,7x5,4cm
Materials	Techno-polymer
Ambient temperature range	-20°C / 35°C
Performance ambient temperature	25°C
Mechanical impact protection code	IK10
Notes	compatible controls: 1-10V, DALI, DMX, Casambi; cable 1m; driver not included, recessed box LUXCASSA3
Accessories	Drivers 350mA, Recessed box, Recessed box cassa 3
Net lamp weight	0,17 kg

Codes

BLUX0103430WTF

Structure


opal white

PACKAGE

Package 01

Dimension: 15x6,5x11 cm / Gross weight: 0,18 kg

Certificazioni

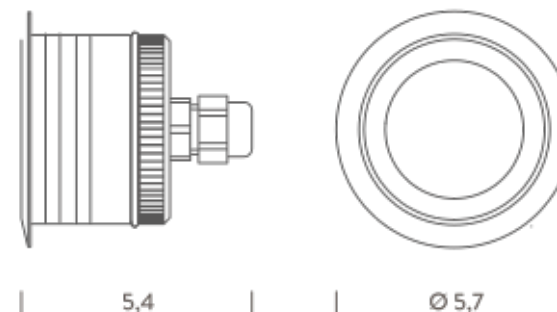

TECHNO-POLYMER | 6000K - 10°

LAMPING

Source	LED spot
Total power	3,6W
Emission	Direct adjustable
Tension	350mA
Color temperature	6000K
Initial luminaire efficacy	55lm/W
Initial chromaticity	SDCM < 5
Typ CRI	80
Energy class	A+
IP class	68
Dimensions	ø5,7x5,4cm
Materials	Techno-polymer
Ambient temperature range	-20°C / 35°C
Performance ambient temperature	25°C
Mechanical impact protection code	IK10
Notes	compatible controls: 1-10V, DALI, DMX, Casambi; cable 1m; driver not included, recessed box LUXCASSA3
Accessories	Drivers 350mA, Recessed box, Recessed box cassa 3
Net lamp weight	0,17 kg

Codes

BLUX0103F300TF

Structure


opal white

PACKAGE

Package 01

Dimension: 15x6,5x11 cm / Gross weight: 0,18 kg

Certificazioni

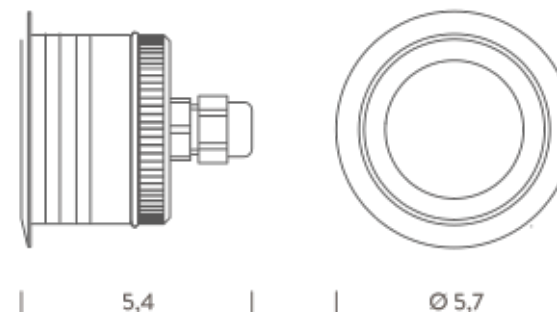

TECHNO-POLYMER | 6000K - 25°

LAMPING

Source	LED spot
Total power	3,6W
Emission	Direct adjustable
Tension	350mA
Color temperature	6000K
Initial luminaire efficacy	25lm/W
Initial chromaticity	SDCM < 5
Typ CRI	80
Energy class	A+
IP class	68
Dimensions	ø5,7x5,4cm
Materials	Techno-polymer
Ambient temperature range	-20°C / 35°C
Performance ambient temperature	25°C
Mechanical impact protection code	IK10
Notes	compatible controls: 1-10V, DALI, DMX, Casambi; cable 1m; driver not included, recessed box LUXCASSA3
Accessories	Drivers 350mA, Recessed box, Recessed box cassa 3
Net lamp weight	0,17 kg

Codes

BLUX01034300TF


Structure

opal white

PACKAGE

Package 01 Dimension: 15x6,5x11 cm / Gross weight: 0,38 kg

Certificazioni

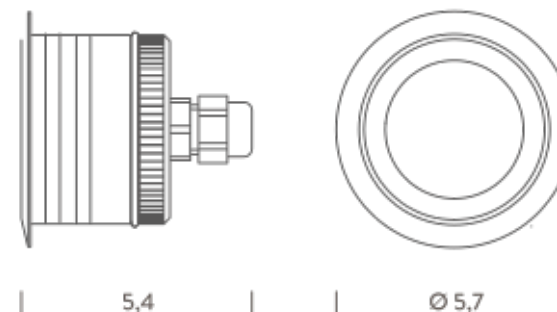

BRASS | RGB - 10°

LAMPING

Source	LED spot
Total power	2W
Emission	Direct adjustable
Tension	700mA
Color temperature	RGB
Initial luminaire efficacy	25lm/W
Initial chromaticity	SDCM < 5
Energy class	A+
IP class	68
Dimensions	ø5,7x5,4cm
Materials	Sanded chromed brass
Ambient temperature range	-20°C / 35°C
Performance ambient temperature	25°C
Mechanical impact protection code	IK10
Notes	compatible controls: 1-10V, DALI, DMX, Casambi; cable 1m; driver not included (12V for submerged applications), recessed box LUXCASSA3
Accessories	Drivers 12VDC + DALI interface, Drivers 24VDC + DALI interface, Recessed box, Recessed box cassa 3
Net lamp weight	0,37 kg

Codes

BLUX0103F306CS


Structure

grey

PACKAGE

Package 01 Dimension: 15x6,5x11 cm / Gross weight: 0,38 kg

Certificazioni

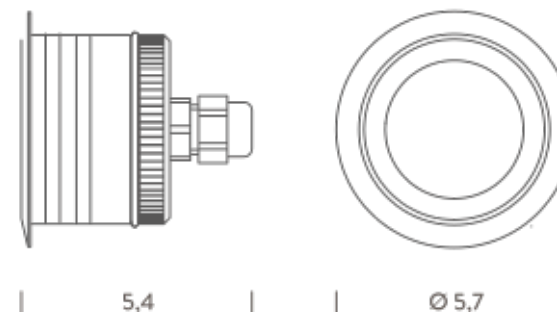

BRASS | RGB - 25°

LAMPING

Source	LED spot
Total power	2W
Emission	Direct adjustable
Tension	700mA
Color temperature	RGB
Initial luminaire efficacy	25lm/W
Initial chromaticity	SDCM < 5
Energy class	A+
IP class	68
Dimensions	ø5,7x5,4cm
Materials	Sanded chromed brass
Ambient temperature range	-20°C / 35°C
Performance ambient temperature	25°C
Mechanical impact protection code	IK10
Notes	compatible controls: 1-10V, DALI, DMX, Casambi; cable 1m; driver not included (12V for submerged applications), recessed box LUXCASSA3
Accessories	Drivers 12VDC + DALI interface, Drivers 24VDC + DALI interface, Recessed box, Recessed box cassa 3
Net lamp weight	0,37 kg

Codes

BLUX01034306CS

Structure


grey

PACKAGE

Package 01

Dimension: 15x6,5x11 cm / Gross weight: 0,18 kg

Certificazioni

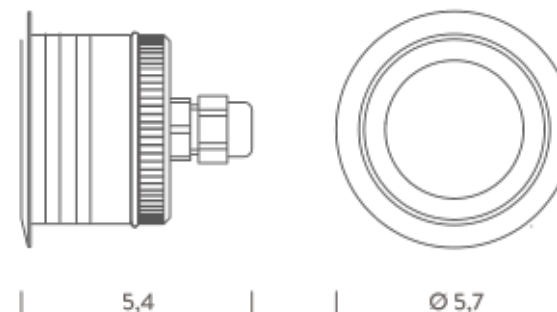

TECHNO-POLYMER | RGB - 10°

LAMPING

Source	LED spot
Total power	2W
Emission	Direct adjustable
Tension	700mA
Color temperature	RGB
Initial luminaire efficacy	25lm/W
Initial chromaticity	SDCM < 3
Energy class	A+
IP class	68
Dimensions	ø5,7x5,4cm
Materials	Techno-polymer
Ambient temperature range	-20°C / 35°C
Performance ambient temperature	25°C
Notes	compatible controls: 1-10V, DALI, DMX, Casambi; cable 1m; driver not included (12V for submerged applications), recessed box LUXCASSA3
Accessories	Drivers 12VDC + DALI interface, Drivers 24VDC + DALI interface, Recessed box, Recessed box cassa 3
Net lamp weight	0,17 kg

Codes

BLUX0103F306TF


Structure

opal white

PACKAGE

Package 01 Dimension: 15x6,5x11 cm / Gross weight: 0,18 kg

Certificazioni

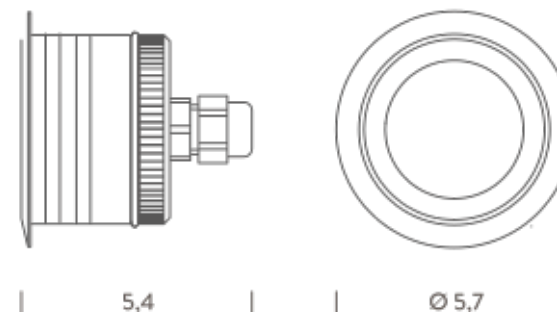

TECHNO-POLYMER | RGB - 25°

LAMPING

Source	LED spot
Total power	2W
Emission	Direct adjustable
Tension	700mA
Color temperature	RGB
Initial luminaire efficacy	55lm/W
Initial chromaticity	SDCM < 3
Energy class	A+
IP class	68
Dimensions	ø5,7x5,4cm
Materials	Techno-polymer
Ambient temperature range	-20°C / 35°C
Performance ambient temperature	25°C
Notes	compatible controls: 1-10V, DALI, DMX, Casambi; cable 1m; driver not included (12V for submerged applications), recessed box LUXCASSA3
Accessories	Drivers 12VDC + DALI interface, Drivers 24VDC + DALI interface, Recessed box, Recessed box cassa 3
Net lamp weight	0,17 kg

Codes

BLUX01034306TF

Structure

opal white

PACKAGE

Package 01 Dimension: 15x4,8x11 cm / Gross weight: 0,31 kg

Certificazioni

