

LUX 25

Lux 25 è un faretto LED per esterni.

Corpo in ottone cromato satinato. E' proposto con differenti fasci ottici e temperature colore o RGB. La staffa permette di fissare il faretto e di orientarlo e con l'ausilio del picchetto, può il posizionamento nel terreno.



3000K | 10°

LAMPING

Source	LED spot
Total power	3,6W
Emission	Direct adjustable
Tension	350mA
Color temperature	3000K
Luminous flux	200lm
Initial luminaire efficacy	55lm/W
Initial chromaticity	SDCM < 3
Typ CRI	> 90
Energy class	A+
IP class	68
Dimensions	ø4,4x8x8cm
Materials	Sanded chromed brass
Ambient temperature range	-20°C / 35°C
Performance ambient temperature	25°C
Notes	compatible controls: 1-10V, DALI, DMX, Casambi; cable 2m; driver not included
Accessories	Drivers 350mA, Fastening, Fastening Peg, Peg
Net lamp weight	0,31 kg

Codes

BLUX0403F30WCS

Structure


grey

PACKAGE

Package 01

Dimension: 15x4,8x11 cm / Gross weight: 0,31 kg

Certificazioni

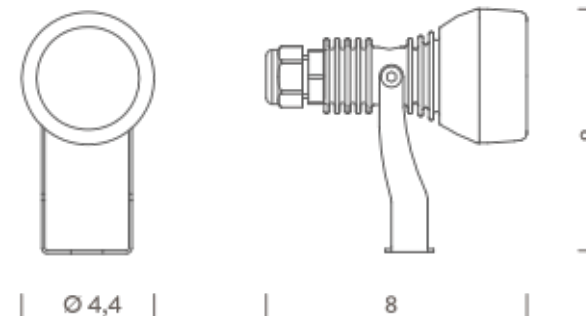

3000K | 25°

LAMPING

Source	LED spot
Total power	3,6W
Emission	Direct adjustable
Tension	350mA
Color temperature	3000K
Initial luminaire efficacy	55lm/W
Initial chromaticity	SDCM < 3
Typ CRI	> 90
Energy class	A+
IP class	68
Dimensions	ø4,4x8x8cm
Materials	Sanded chromed brass
Ambient temperature range	-20°C / 35°C
Performance ambient temperature	25°C
Notes	compatible controls: 1-10V, DALI, DMX, Casambi; cable 2m; driver not included
Accessories	Drivers 350mA, Fastening, Fastening Peg, Peg
Net lamp weight	0,31 kg

Codes

BLUX0403430WCS


Structure

grey

PACKAGE

Package 01	Dimension: 15x4,8x11 cm / Gross weight: 0,31 kg
------------	---

Certificazioni

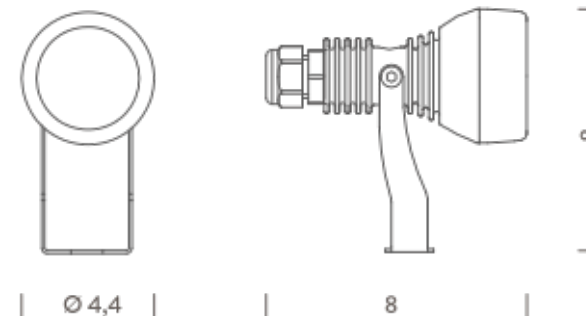

6000K | 10°

LAMPING

Source	LED spot
Total power	3,6W
Emission	Direct adjustable
Tension	350mA
Color temperature	6000K
Initial luminaire efficacy	55lm/W
Initial chromaticity	SDCM < 5
Typ CRI	80
Energy class	A+
IP class	68
Dimensions	ø4,4x8x8cm
Materials	Sanded chromed brass
Ambient temperature range	-20°C / 35°C
Performance ambient temperature	25°C
Notes	compatible controls: 1-10V, DALI, DMX, Casambi; cable 2m; driver not included
Accessories	Drivers 350mA, Fastening, Fastening Peg, Peg
Net lamp weight	0,31 kg

Codes

BLUX0403F300CS


Structure

grey

PACKAGE

Package 01 Dimension: 15x4,8x11 cm / Gross weight: 0,31 kg

Certificazioni

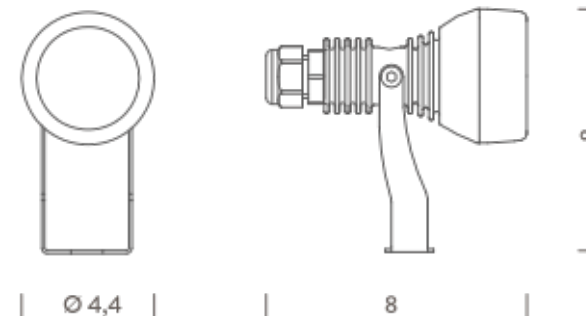

6000K | 25°

LAMPING

Source	LED spot
Total power	3,6W
Emission	Direct adjustable
Tension	350mA
Color temperature	6000K
Initial luminaire efficacy	25lm/W
Initial chromaticity	SDCM < 5
Typ CRI	80
Energy class	A+
IP class	68
Dimensions	ø4,4x8x8cm
Materials	Sanded chromed brass
Ambient temperature range	-20°C / 35°C
Performance ambient temperature	25°C
Notes	compatible controls: 1-10V, DALI, DMX, Casambi; cable 2m; driver not included
Accessories	Drivers 350mA, Fastening, Fastening Peg, Peg
Net lamp weight	0,31 kg

Codes

BLUX04034300CS


Structure

grey

PACKAGE

Package 01	Dimension: 15x4,8x11 cm / Gross weight: 0,31 kg
------------	---

Certificazioni

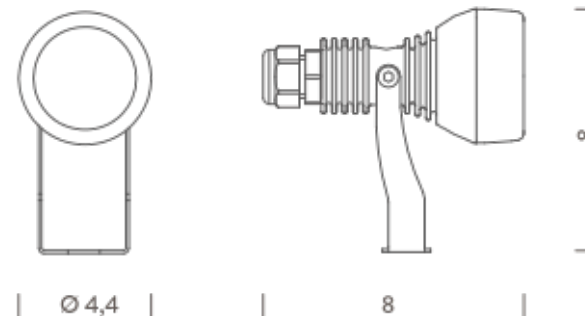

RGB | 10°

LAMPING

Source	LED spot
Total power	3,6W
Emission	Direct adjustable
Tension	350mA
Color temperature	RGB
Initial luminaire efficacy	25lm/W
Initial chromaticity	SDCM < 3
Energy class	A+
IP class	68
Dimensions	ø4,4x8x8cm
Materials	Sanded chromed brass
Ambient temperature range	-20°C / 35°C
Performance ambient temperature	25°C
Notes	compatible controls: 1-10V, DALI, DMX, Casambi; cable 2m; driver not included (12V for submerged applications)
Accessories	Drivers 12VDC + DALI interface, Drivers 24VDC + DALI interface, Fastening, Fastening Peg, Peg
Net lamp weight	0,31 kg

Codes

BLUX0403F306CS

Structure


grey

PACKAGE

Package 01

Dimension: 15x4,8x11 cm / Gross weight: 0,31 kg

Certificazioni

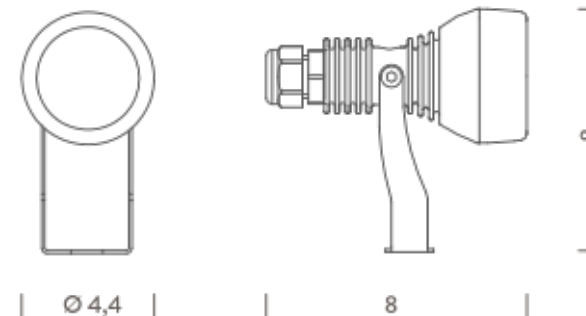

RGB | 25°

LAMPING

Source	LED spot
Total power	3,6W
Emission	Direct adjustable
Tension	350mA
Color temperature	RGB
Initial luminaire efficacy	70lm/W
Initial chromaticity	SDCM < 3
Energy class	A+
IP class	68
Dimensions	ø4,4x8x8cm
Materials	Sanded chromed brass
Ambient temperature range	-20°C / 35°C
Performance ambient temperature	25°C
Notes	compatible controls: 1-10V, DALI, DMX, Casambi; cable 2m; driver not included (12V for submerged applications)
Accessories	Drivers 12VDC + DALI interface, Drivers 24VDC + DALI interface, Fastening, Fastening Peg, Peg
Net lamp weight	0,31 kg

Codes

BLUX04034306CS

Structure

grey

PACKAGE

Package 01

Dimension: 11,5x11x8 cm / Gross weight: 0,3 kg

Certificazioni

