

ZENA

Roberto Paoli

L'essenzialità di Zena è il risultato di un attento studio di ricerca geometrica, che ha generato un oggetto essenziale e potente con importanti prestazioni luminose. Zena rappresenta una rivoluzione nel mondo delle lampade a parete, un esperimento contemporaneo che trasforma l'appliche da oggetto tradizionalmente statico in elemento dinamico e sofisticato, un'importante sintesi tra obiettivi di leggerezza, potenza e fruibilità. Zena è realizzata da un estruso in alluminio riciclabile.



ZENA - IP20 | 2700K

LAMPING

Source	linear LED
Total power	30W
Emission	indirect
Switching	dimnable TRIAC
Tension	230V
Color temperature	2700K
Luminous flux	3000lm
Typ CRI	85
IP class	20
Dimensions	26x8,5x7cm
Materials	Aluminum + PC/ABS
Net lamp weight	1 kg

Codes

ZEN LW2 31
ZEN LN2 31

Structure/Diffuser


white/opal
black/opal

PACKAGE

Package 01

Dimension: 15x15x35 cm / Gross weight: 1,5 kg

Certificazioni

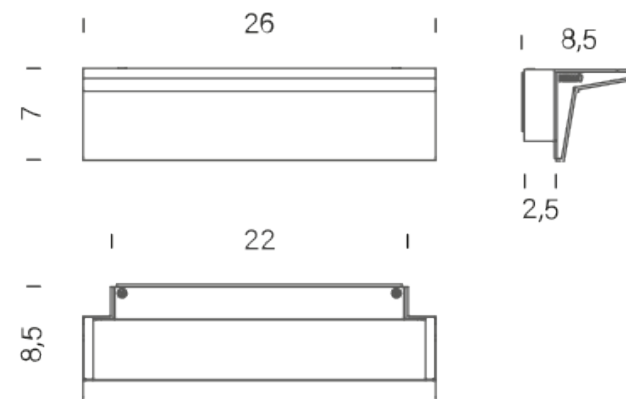

ZENA - IP20 | 3000K

LAMPING

Source	linear LED
Total power	30W
Emission	indirect
Switching	dimnable TRIAC
Tension	230V
Color temperature	3000K
Luminous flux	3000lm
Typ CRI	85
IP class	20
Dimensions	26x8,5x7cm
Materials	Aluminum + PC/ABS
Net lamp weight	1 kg

Codes

ZEN LWW 31
ZEN LNW 31

Structure/Diffuser


white/opal
black/opal

PACKAGE

Package 01

Dimension: 15x15x35 cm / Gross weight: 1,5 kg

Certificazioni

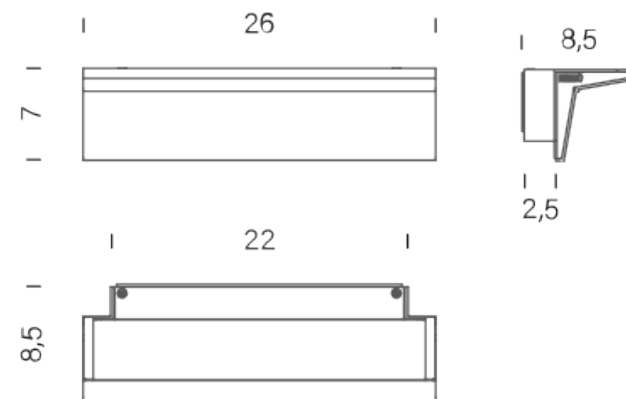

ZENA - IP44 | 2700K

LAMPING

Source	linear LED
Total power	30W
Emission	indirect
Switching	dimnable TRIAC
Tension	230V
Color temperature	2700K
Luminous flux	3000lm
Typ CRI	85
IP class	44
Dimensions	26x8,5x7cm
Materials	Aluminum + PC/ABS
Net lamp weight	1 kg

Codes

ZEN LN2 33
ZEN LW2 33

Structure/Diffuser


black/opal
white/opal

PACKAGE

Package 01

Dimension: 15x15x35 cm / Gross weight: 1,5 kg

Certificazioni

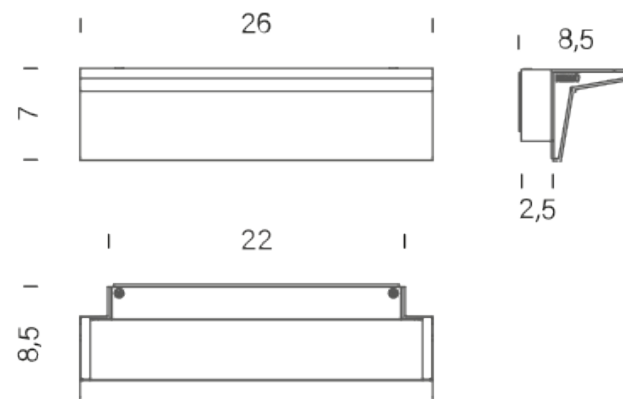

ZENA - IP44 | 3000K

LAMPING

Source	linear LED
Total power	30W
Emission	indirect
Switching	dimnable TRIAC
Tension	230V
Color temperature	3000K
Luminous flux	3000lm
Typ CRI	85
IP class	IP44
Dimensions	26x8,5x7cm
Materials	Aluminum + PC/ABS
Net lamp weight	1 kg

Codes

ZEN LNW 33
ZEN LWW 33

Structure/Diffuser


black/opal
white/opal

PACKAGE

Package 01

Dimension: 15x15x35 cm / Gross weight: 1,5 kg

Certificazioni

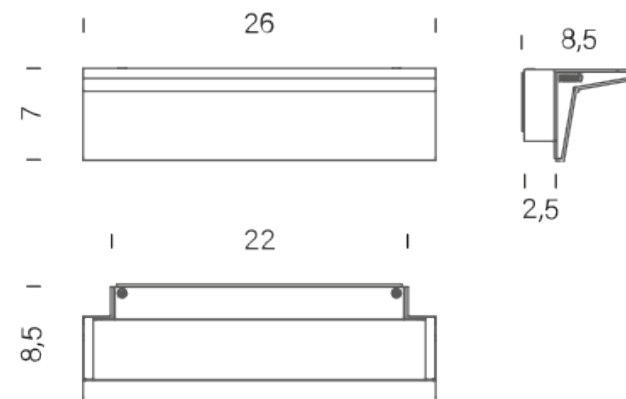

ZENA 60 - IP20 | 2700K

LAMPING

Source	LED board
Total power	28W
Switching	dimnable TRIAC
Tension	230V
Color temperature	2700K
Luminous flux	3000lm
Typ CRI	85
IP class	20
Dimensions	60x7x8,5
Materials	aluminium
Notes	white RAL 9003, black RAL 9005


Codes

ZEN LW2 34
ZEN LN2 34

Structure

white opal
black opal

Certificazioni

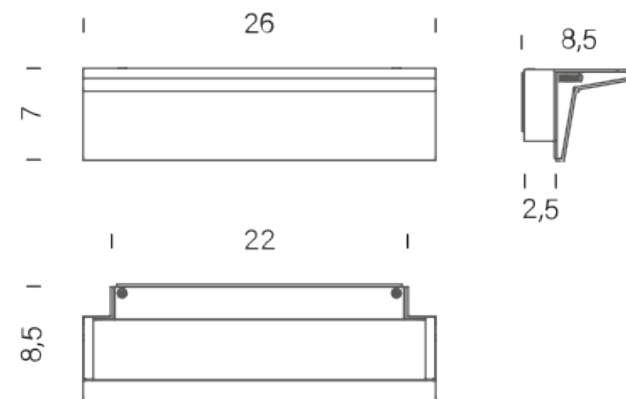

ZENA 60 - IP20 | 3000K

LAMPING

Source	LED board
Total power	28W
Switching	dimnable TRIAC
Tension	230V
Color temperature	3000K
Luminous flux	3000lm
Typ CRI	85
IP class	20
Dimensions	60x7x8,5
Materials	aluminium
Notes	white RAL 9003, black RAL 9005


Codes

ZEN LWW 34
ZEN LNW 34

Structure

white opal
black opal

Certificazioni

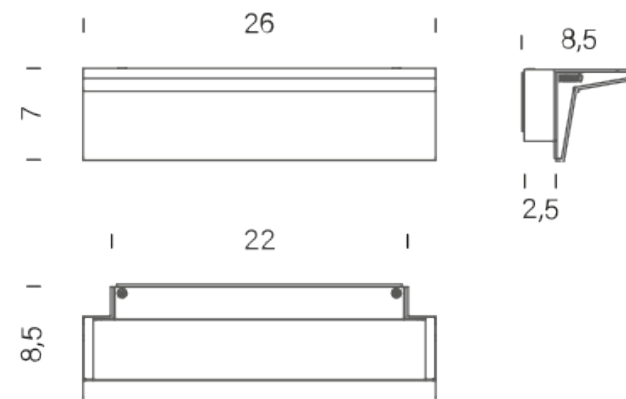

ZENA 60 - IP44 | 2700K

LAMPING

Source	LED board
Total power	28W
Switching	dimnable TRIAC
Tension	230V
Color temperature	2700K
Luminous flux	3000lm
Typ CRI	85
IP class	44
Dimensions	60x7x8,5
Materials	aluminium
Notes	white RAL 9003, black RAL 9005


Codes

ZEN LW2 35
ZEN LN2 35

Structure

white opal
black opal

Certificazioni

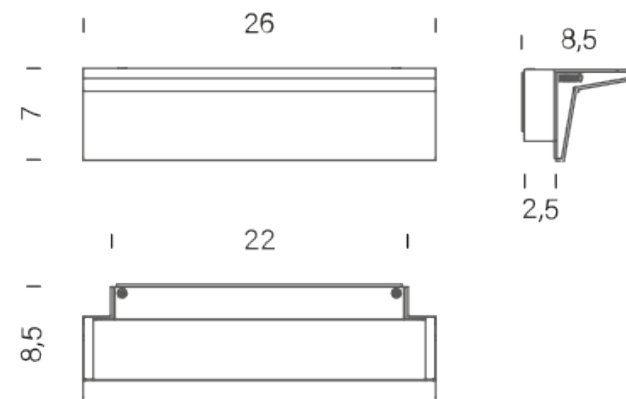

ZENA 60 - IP44 | 3000K

LAMPING

Source	LED board
Total power	28W
Switching	dimnable TRIAC
Tension	230V
Color temperature	3000K
Luminous flux	3000lm
Typ CRI	85
IP class	44
Dimensions	60x7x8,5
Materials	aluminium
Notes	white RAL 9003, black RAL 9005

Codes

ZEN LWW 35
ZEN LNW 35

Structure

white opal
black opal

Certificazioni

